

EAN: 6414150079573

www.oras.com/en/products/oras/product/2739F



Kitchen faucet with side operated easy-grip lever, flexible high swivel spout, aerator and smart dishwasher valve. Spout's swing angle is factory preset at 120° (can be limited to 60° or 80°). Dishwasher valve closes automatically after 4 or 12 hours (one push opens the valve for 4 hours, pushing for 5 seconds opens the valve for 12 hours). Battery operated, 6 V. The faucet is equipped with litter filters.

F = with flexible pipes.

- Kitchen
- Side operated, Single lever, Battery-operated
- Deck mounted
- Chrome
- Swivel spout
- electronic utility shut-off valve
- Easy-Grip Lever
- integrated diverter with automatic reset
- Pull-out hand spray
- Adjustable hot water stop (retrofittable), adjustable mix water temperature
- Litter filter(s)
- Signal lights
- body made of DZR brass, surfaces in contact with drinking water contain less than 0.3% lead, waterways without nickel coating

Technical data

Flow properties

Flow-rate at 300 kPa	0.2 l/s
Pressure loss with flow (0.2 l/s)	300 kPa

Technical properties

DN-size (nominal dimension)	DN15
Hot water supply	max. +70°C
Working pressure	100 - 1000 kPa
Connection size	G3/8
Projection	200 mm
Material	brass

Software settings


Dishwasher valve open period	4 h / 12 h
------------------------------	-------------------




Electronic properties

Battery	Lithium 2CR5 6 V
---------	-------------------------


Regulations

EMC Directive	CE 2014/30/EU
EN standard	EN 15091
Noise class	I (ISO 3822) Oras lab.
Protection class	IP 55

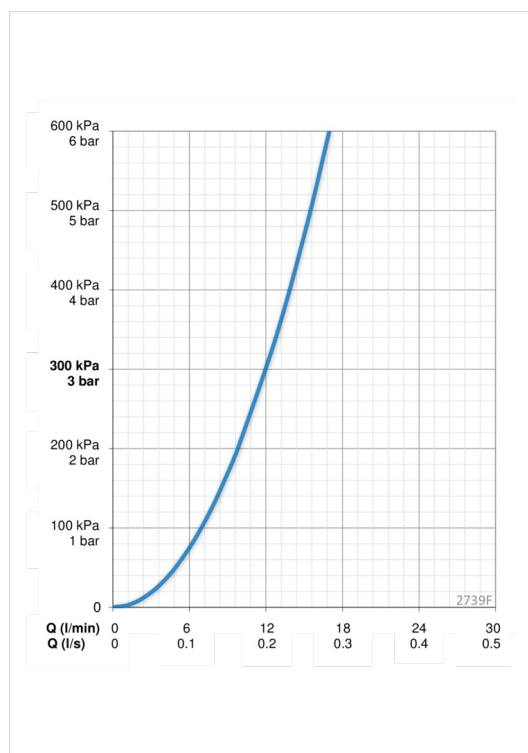

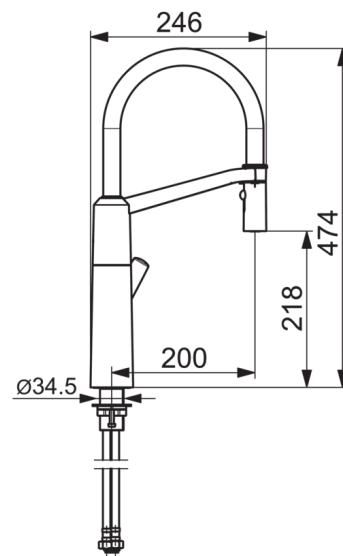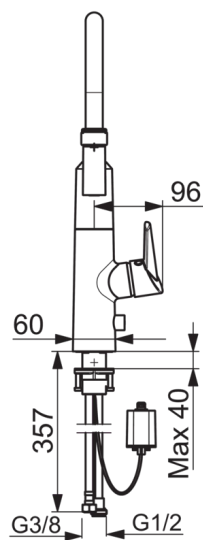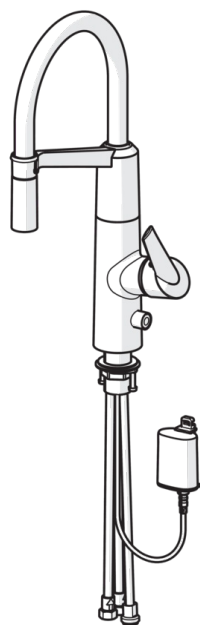

Spare parts

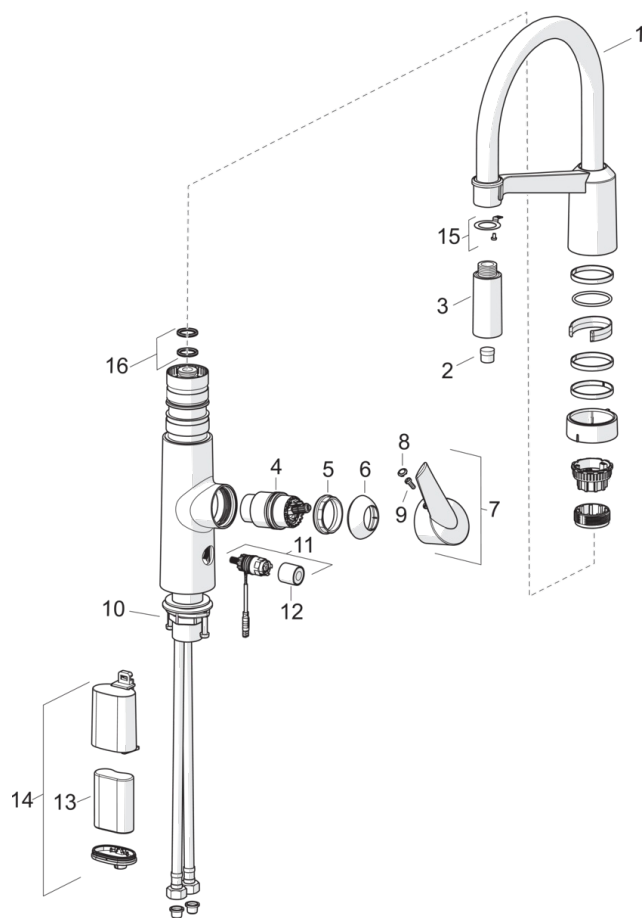

SP2739F

	Code
01	1002660V
02	1000972V
03	1001321V
04	158890
05	158726
06	159053V
07	601319V
08	159020/10
09	159248/10
10	602629V
11	600047V
12	600093V
13	198330
14	199417V
15	1001323V
16	601072V